

N-Series

COMBISTAR

Technical specifications


N-120EL12

N-140EL12

N-165EL12

N-195EL12

FEATURES		N-120EL12	N-140EL12	N-165EL12	N-195EL12
Working height		± 13,70 m	± 16,00 m	± 18,50 m	± 21,40 m
A Max. Platform height		± 11,70 m	± 14,00 m	± 16,50 m	± 19,40 m
C Min. Platform height		1,80 m	2,02 m	2,24 m	2,58 m
D x F Platform dimensions (retracted)		3,38 x 1,16 m	3,38 x 1,16 m	3,38 x 1,16 m	3,38 x 1,16 m
E x F Platform dimensions (extended)		4,88 x 1,16 m	4,88 x 1,16 m	4,88 x 1,16 m	4,88 x 1,16 m
H1 Transport height		2,96 m	3,18 m	3,40 m	3,74 m
H3 Transport height (handrail folded)		2,34 m	2,56 m	2,78 m	3,14 m
L x B Transport dimensions		3,74 x 1,20 m	3,74 x 1,20 m	3,74 x 1,20 m	3,74 x 1,20 m
G Wheel base		2,67 m	2,67 m	2,67 m	2,67 m
M / N Ground clearance		148 mm / 235 mm	148 mm / 235 mm	148 mm / 235 mm	148 mm / 235 mm
Turning radius outside		± 3,92 m	± 3,92 m	± 3,92 m	± 3,92 m
Capacity main-platform		1000 kg (2 pers. + 840 kg)	750 kg (2 pers. + 590 kg)	500 kg (2 pers. + 340 kg)	500 kg (2 pers. + 340 kg)
Capacity roll-out deck		1000 kg (2 pers. + 840 kg)	750 kg (2 pers. + 590 kg)	500 kg (2 pers. + 340 kg)	500 kg (2 pers. + 340 kg)
Lift- / lower time (max. load)		65 / 40 sec.	70 / 45 sec.	80 / 50 sec.	90 / 55 sec.
Drive speed (high)		2,0 km/h	2,0 km/h	2,0 km/h	2,0 km/h
Drive speed (low)		0,5 km/h	0,5 km/h	0,5 km/h	0,5 km/h
Tyres, solid rubber (non marking)		●	●	●	●
Gradeability		± 25 %	± 25 %	± 25 %	± 25 %
Batteries (traction acid)		420 Ah / k5 / 48 V	420 Ah / k5 / 48 V	420 Ah / k5 / 48 V	500 Ah / k5 / 48 V
Gross weight		7.000 kg	7.550 kg	7.985 kg	8.500 kg
OPTIONS					
Controlbox w/ quickdisconnect		●	●	●	●
Hourmeter		●	●	●	●
230 Volt supply on the platform		○	○	○	○
Charger (high frequent)		●	●	●	●
Driving, proportional		●	●	●	●
SAFETY FEATURES					
Scissor skirt		●	●	●	●
Drive alarm		●	●	●	●
Emergency descent		●	●	●	●
APPLICATION					
Indoors		●	●	●	●
Outdoors		--	--	--	--
Certified min. Temperature		- 15 ° C	- 15 ° C	- 15 ° C	- 15 ° C

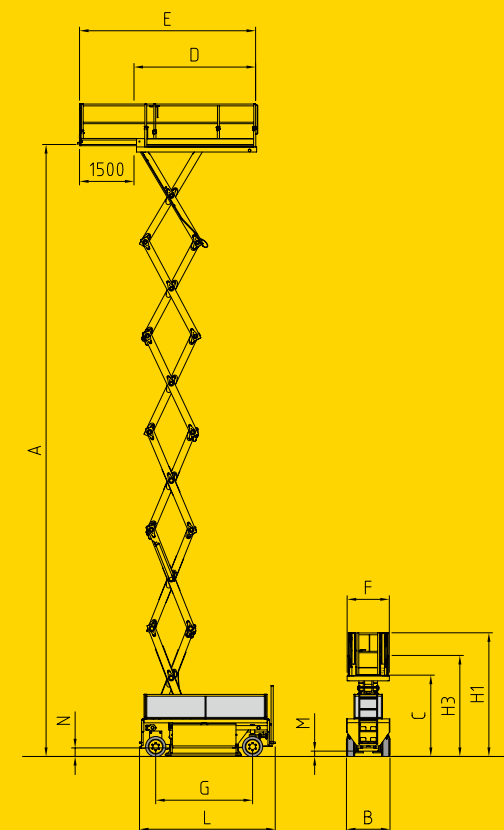

Holland Lift International B.V.

Anodeweg 1
 NL-1627 LJ HOORN
 T +31 (0)229 28 55 55
 F +31 (0)229 28 55 50

P.O. Box 2321
 NL-1620 EH HOORN

www.hollandlift.com



Quality extends further
HOLLAND LIFT